



Compact Transglobal Adventure Vehicle

The Toyota Landcruiser HZJ79 is an extremely strong and reliable long-term off-road vehicle, which is legendary for its performance the world over. Combined with the bimobil high quality cabin build, this makes the EX280 the ultimate compact expedition vehicle, which can easily be serviced or repaired anywhere in the world, and provides comfort and versatility for two persons.

The bimobil EX280's specially adapted engine is Euro V compliant to meet European Emissions Standards, while enabling the added equipment to be removed easily for use outside of Europe.

The EX280 is fully winterised for all seasons and conditions, performing superbly in the most hostile environments. It benefits from the choice

of two layout options. The spacious 2L layout can be fitted with a large optional tailgate so that you can enjoy alfresco dining. While layout 3 will seat four people comfortably when you have visitors, and has additional storage space in the garage under the forward seating area. On both layout options the seating area can be converted easily into an extra bed. Both layouts have a large 1.5m by 2m Luton bed with Froli spring system, compressor refrigerator, diesel-fired heating, kitchen, shower, WC, wardrobe and lots of storage space, making these units fully equipped and self-sufficient for long term overland travel. As with all bimobils there is a large optional accessories list from which to choose from, to tailor this vehicle to meet your own travel requirements.




EX 280


bimobil



Layout 2L



Layout 3

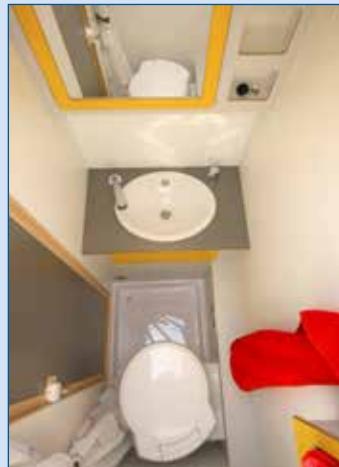

EX 280 on Toyota Landcruiser HZJ 79

Equipment	Layout 2L	Layout 3	Layout 2L	Layout 3
Windows	5		Resolux lights	3
Skylights	2		LED Lights	4
External Lockers	1		Entrance Light	1
Fresh Water Tank	80 l		12V Sockets	3
Waste Water Tank (non-freeze)	60 l		Auxiliary Battery	Gel 120 Ah
Absorption Refrigerator	65 l	65 l	Battery Isolator	Relay
Gas Bottle Compartment	1 x 5 kg		Mains Hook-Up 220V	CEE
Gas Regulator	30 mb		220V Sockets (only with 220V)	2
Heater		Truma Combi 4	Breaker	with current leakage switch
Boiler		10 l integrated	Battery Charger	IUoU 16A
WC Cassette	19 l	17,5 l		

Internal Dimensions

Floor Length without Overcab	2720 mm
Width	2000 mm
Height	1930 mm

External Dimensions

Total Length	5820 mm
Width	2140 mm
Height	3030 mm

Bed Dimensions

	Layout 2L	Layout 3
Luton	1500 x 2000 mm	1500 x 2000 mm
Seating area	770 / 1100 x 1960 mm	1010 x 1960 mm
Luton height above mattress	625 mm	625 mm

Base Vehicle Toyota Landcruiser HZJ 79

Model	HZJ 79 chassis single cab
Engine	Diesel 6 cylinders
Power	96 kW / 131 cv
Capacity	4146 cc
Fuel Tank	90l + 90l
Wheelbase	2980 mm
Equipment	Driver and passenger airbags, manual aircon, insertable all wheel drive, 5 gear manual gear box, reinforced rear axle, auxiliary fuel tank with separate fuel gauge, snorkel

Weights

Maximum Technically Permitted Mass (upgraded)	3500 kg
Mass in Running Order*	3100 kg
Payload	400 kg
Seats	2
Payload decrease if demountable	-150 kg
Load permitted on Roof	100 kg



Adventure Overland UK Ltd
The Old Barn, 34A Town Street
Marple Bridge, Stockport
SK65AA Cheshire, United Kingdom
Tel. +44 (0) 161 4273364
info@adventureoverlanduk.com
www.adventureoverlanduk.com

bimobil

bimobil - von Liebe GmbH
Aich 15 - D-85667 Oberpfraßmern
Tel +49 (0)8106/9969 - 0
Fax +49 (0)8106/9969 - 69
www.bimobil.com · info@bimobil.com

* MRO Mass in Running Order includes the standard vehicle with all standard equipment, with driver, full fuel tank, water and gas fill 90%, boiler full of water, electrical hook-up cable. The equipment described above is the standard. Extra accessories and their weights please see the price list. For accessories not included in the price list or different layouts please contact bimobil. Some photographs show extra accessories and decoration not included in the standard. Please contact bimobil or the dealer for the current standard equipment. Extra accessories increase the curbside weight of the vehicle and reduce the payload and/or the number of passengers permitted. Weights and measures are subject to tolerance of ±5%. bimobil reserves the right to change specification without notice.